

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
3 June 2004 (03.06.2004)


PCT

(10) International Publication Number
WO 2004/047228 A1

- (51) International Patent Classification⁷: **H01R 12/16**, G06K 7/00
- (21) International Application Number: **PCT/US2003/036952**
- (22) International Filing Date:
19 November 2003 (19.11.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
2002-334972 19 November 2002 (19.11.2002) JP
- (71) Applicant (for all designated States except US): **MOLEX INCORPORATED** [US/US]; 2222 Wellington Court, Lisle, IL 60532 (US).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **TOSHIHISA, Hirata** [JP/JP]; Corpo-Sunrise 101, 2-31, Fukami-nishi, 1-chome, Yamato-shi, Kanagawa 242-0018 (JP).
- (74) Agent: **CALDWELL, Stacey, E.**; Molex Incorporated, 2222 Wellington Court, Lisle, IL 60532 (US).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.
- (84) Designated States (*regional*): ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:
— with international search report
— before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

[Continued on next page]

(54) Title: IMPROVED MEMORY CARD CONNECTOR

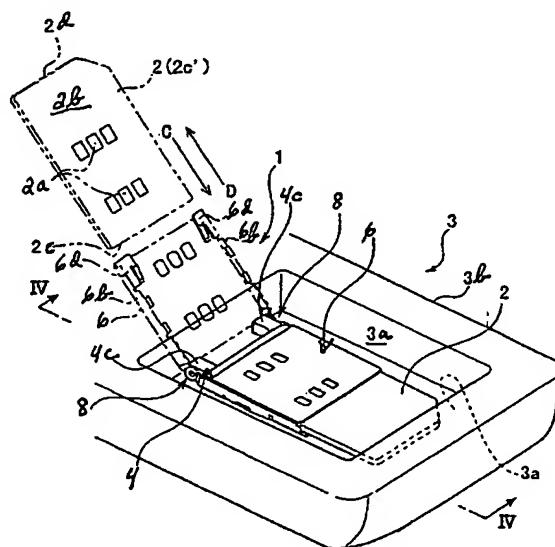

(57) Abstract: A memory card connector is provided for receiving a memory card having a plurality of conductive contacts. The connector includes an insulating housing mounting a plurality of conductive terminals. A cover has a receptacle for receiving the memory card. A pivot-detent mechanism is operatively associated between the cover and the housing and movably mounts the cover to the housing. The mechanism includes a pivot device engageable between the cover and the housing to mount the cover for pivotal movement between an open position to allow the memory card to be received on the cover and a closed position bringing the contacts of the memory card into engagement with the terminals on the housing. The mechanism includes a detent device engageable between the cover and the housing to allow the cover to slidably move from the closed position to a latched position. A portion of the pivot device provides a dual function of forming a portion of the detent device.



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.